

DIVAL Evolution SYSTEM


Specifications

- Demountable partition, 75mm thick, with joint-covers.
- Maximum height: 3200 (depending on elevations).
- Aluminium profiles, silver anodised or RAL powder-coated.
- Runner: Top and down runner: 40x1.5mm or 40x5mm.
Alternative top runners for suspension hook, with adjustable joint-covers.
- Joint-cover: 40x1.5mm flat joint-cover, 40x1.5 hollow joint-cover, 40x1.5 Omega joint-cover or 40x5mm joint-cover.
- Any combination possible: full-height solid, full-height glazed, glazed above dado panel, glazed at door height, multi-transoms, etc...
- Single glazing, double glazing profile in aluminium or PVC.
- Doorframe profile: square or rounded.
- Square right angle, variable angle 2D, 3D, or in T-shape.
- Electrical rail can be incorporated.
- Solid sections: vinyle-decorated plasterboards 13mm thick, melaminated panels, veneer panels, real wood panels, 12mm thick. Acoustic isolation with rock wool, 45mm thick.
- Glazed sections (single or double glass): clear float glass, laminate glass, toughened glass, from 5 to 12mm thick. Sanded glass, decorative film, blinds possible.
- Standard doors:
Laminated wooden door, 40mm thick,
Aluminium-framed glass door, single or double glass,
Frameless security glass door, 8mm or 10mm thick
- Light switch can be integrated to the doorframe jamb.
- Sliding door (wall-mounted): Laminated wooden door, 40mm thick
Aluminium-framed glass door, single or double glass
- Acoustics : Solid wall : $R_w=42\text{dB}$ (test N° 2312.6.807)
Solid wall w/ door: $R_w=34\text{dB}$ (test N°2312.6.807)
- Accessories : Aluminium slot chanel and aluminium brackets for wooden/glass shelves
Electrical strike plate, narrow light switch on doorframe, picture hooks

PICTURES



VERTICAL SECTIONS

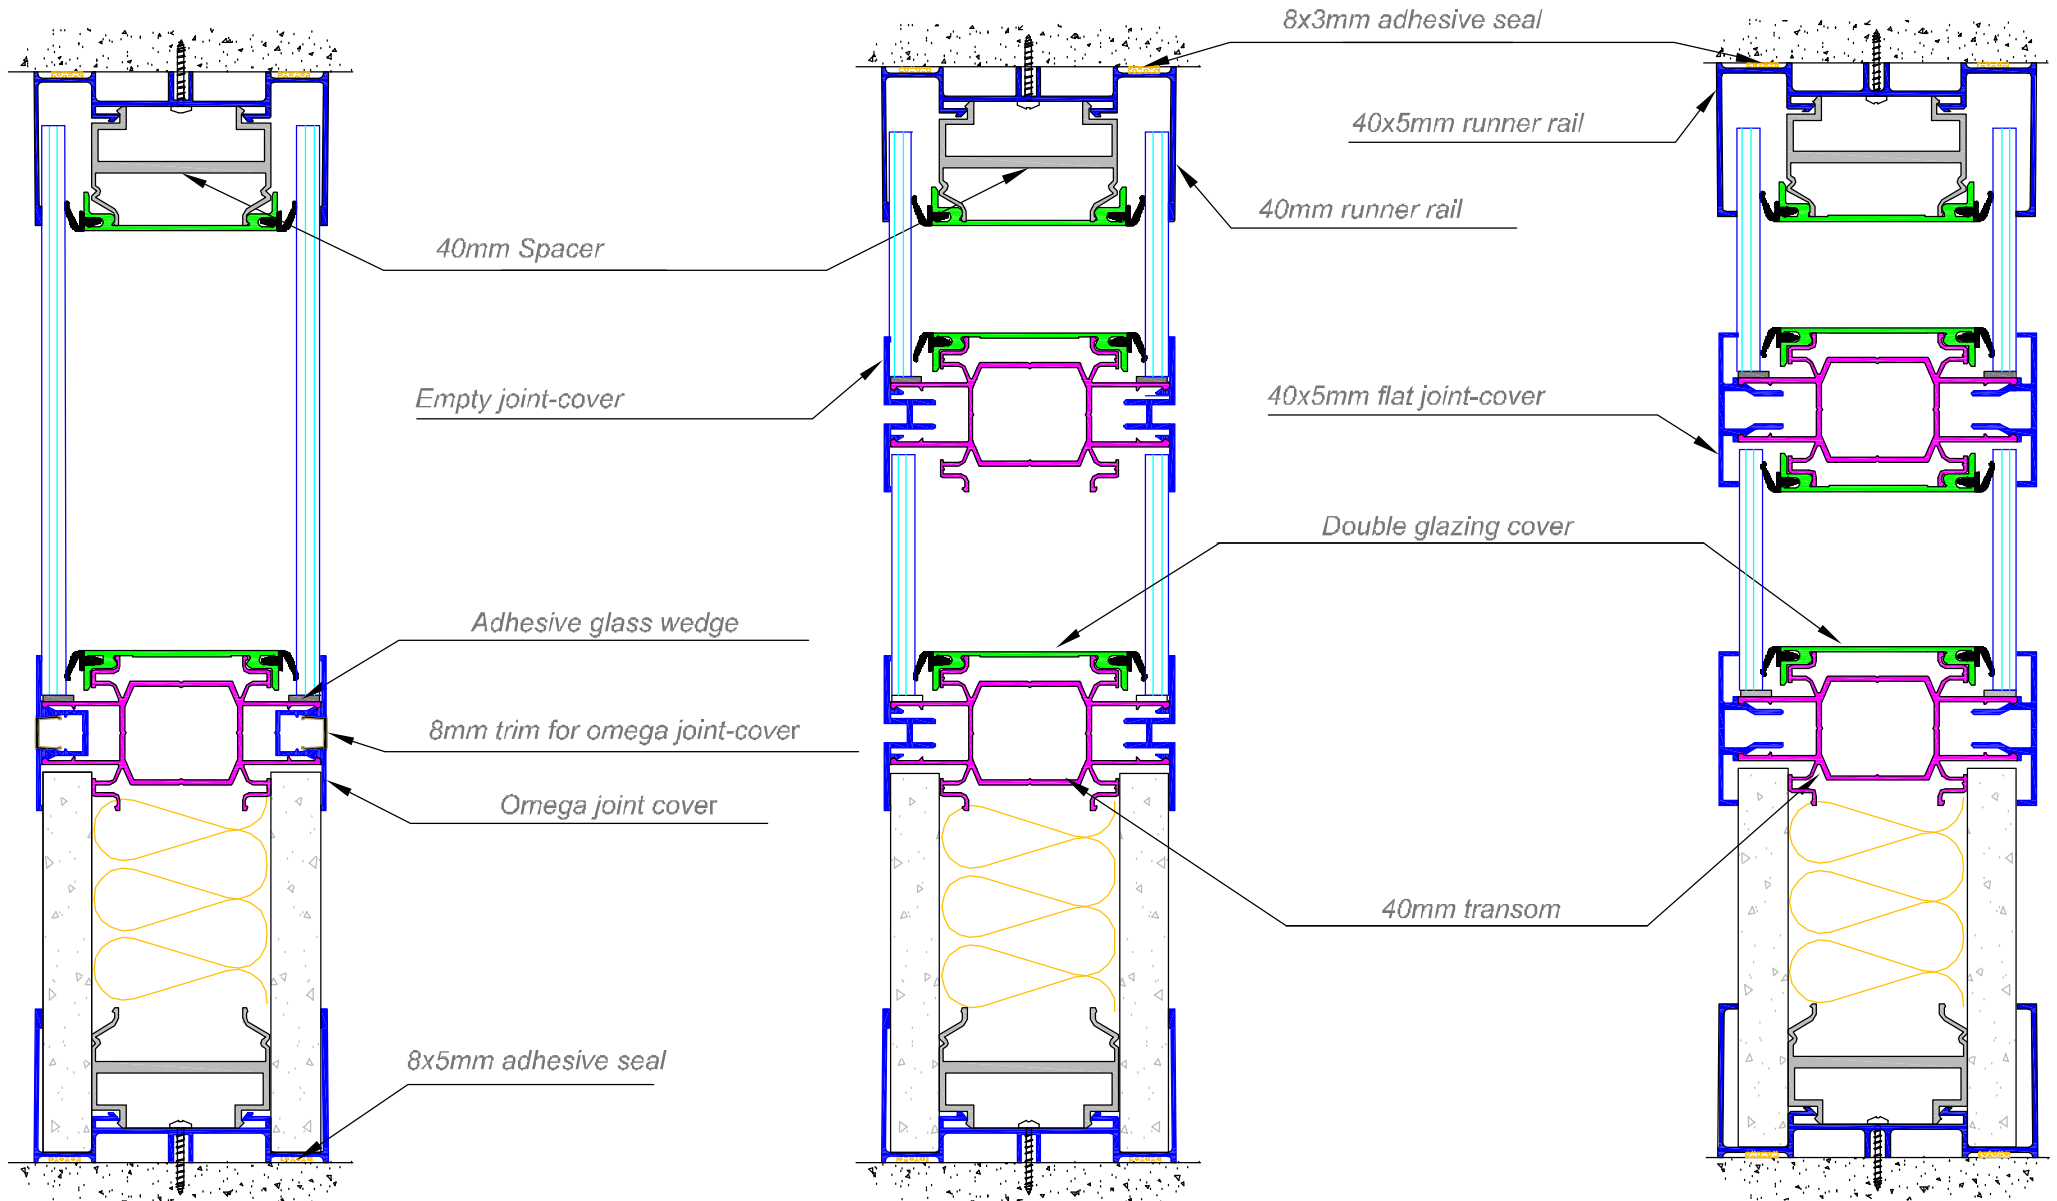

HORIZONTAL SECTION

