

PARTITION® 100 SYSTEM


Specifications

- Demountable partition, 100mm thick, with joint-covers.
- Maximum height : 4500 (depending on elevations)
For bigger heights, reinforcement of the structure required
- Aluminium profiles, silver anodised or RAL powder-coated.
- Top runners, down runners and joint-covers : 40x1.5mm.
- Any combination possible : full-height solid, full-height glazed, glazed above dado panel, glazed at door height, multi-transoms, etc...
- Single glazing, double glazing profiles.
- Doorframe profile : square or rounded.
- Variable angle 2D or 3D.
- Electrical rail can be incorporated.
- Solid sections : vinyle-decorated plasterboards 13mm thick, melaminated panels, veneer panels, real wood panels, 12mm thick. Acoustic isolation with rock wool, 75mm thick.
- Glazed sections (single or double glass) : clear float glass, laminate glass, toughened glass, from 5 to 12mm thick. Sanded glass, decorative film, blinds possible.
- Standard doors :
 - Laminated wooden door, 40mm thick,
 - Aluminium-framed glass door, single or double glass,
 - Frameless security glass door, 8mm or 10mm thick.
- Light switch can be integrated to the doorframe jamb.
- Sliding door :
 - Laminated wooden door, 40mm thick
 - Aluminium-framed glass door, single or double glass
- Acoustics :
 - Rw=47 to 48dB in solid (test report n°B954.5.2061)
 - Rw=44 in full height double glazed (test report n°B954.5.2061)
 - Rw=45dB in glazed above dado panel (test report n°B954.5.2061)

PICTURES



VERTICAL SECTIONS

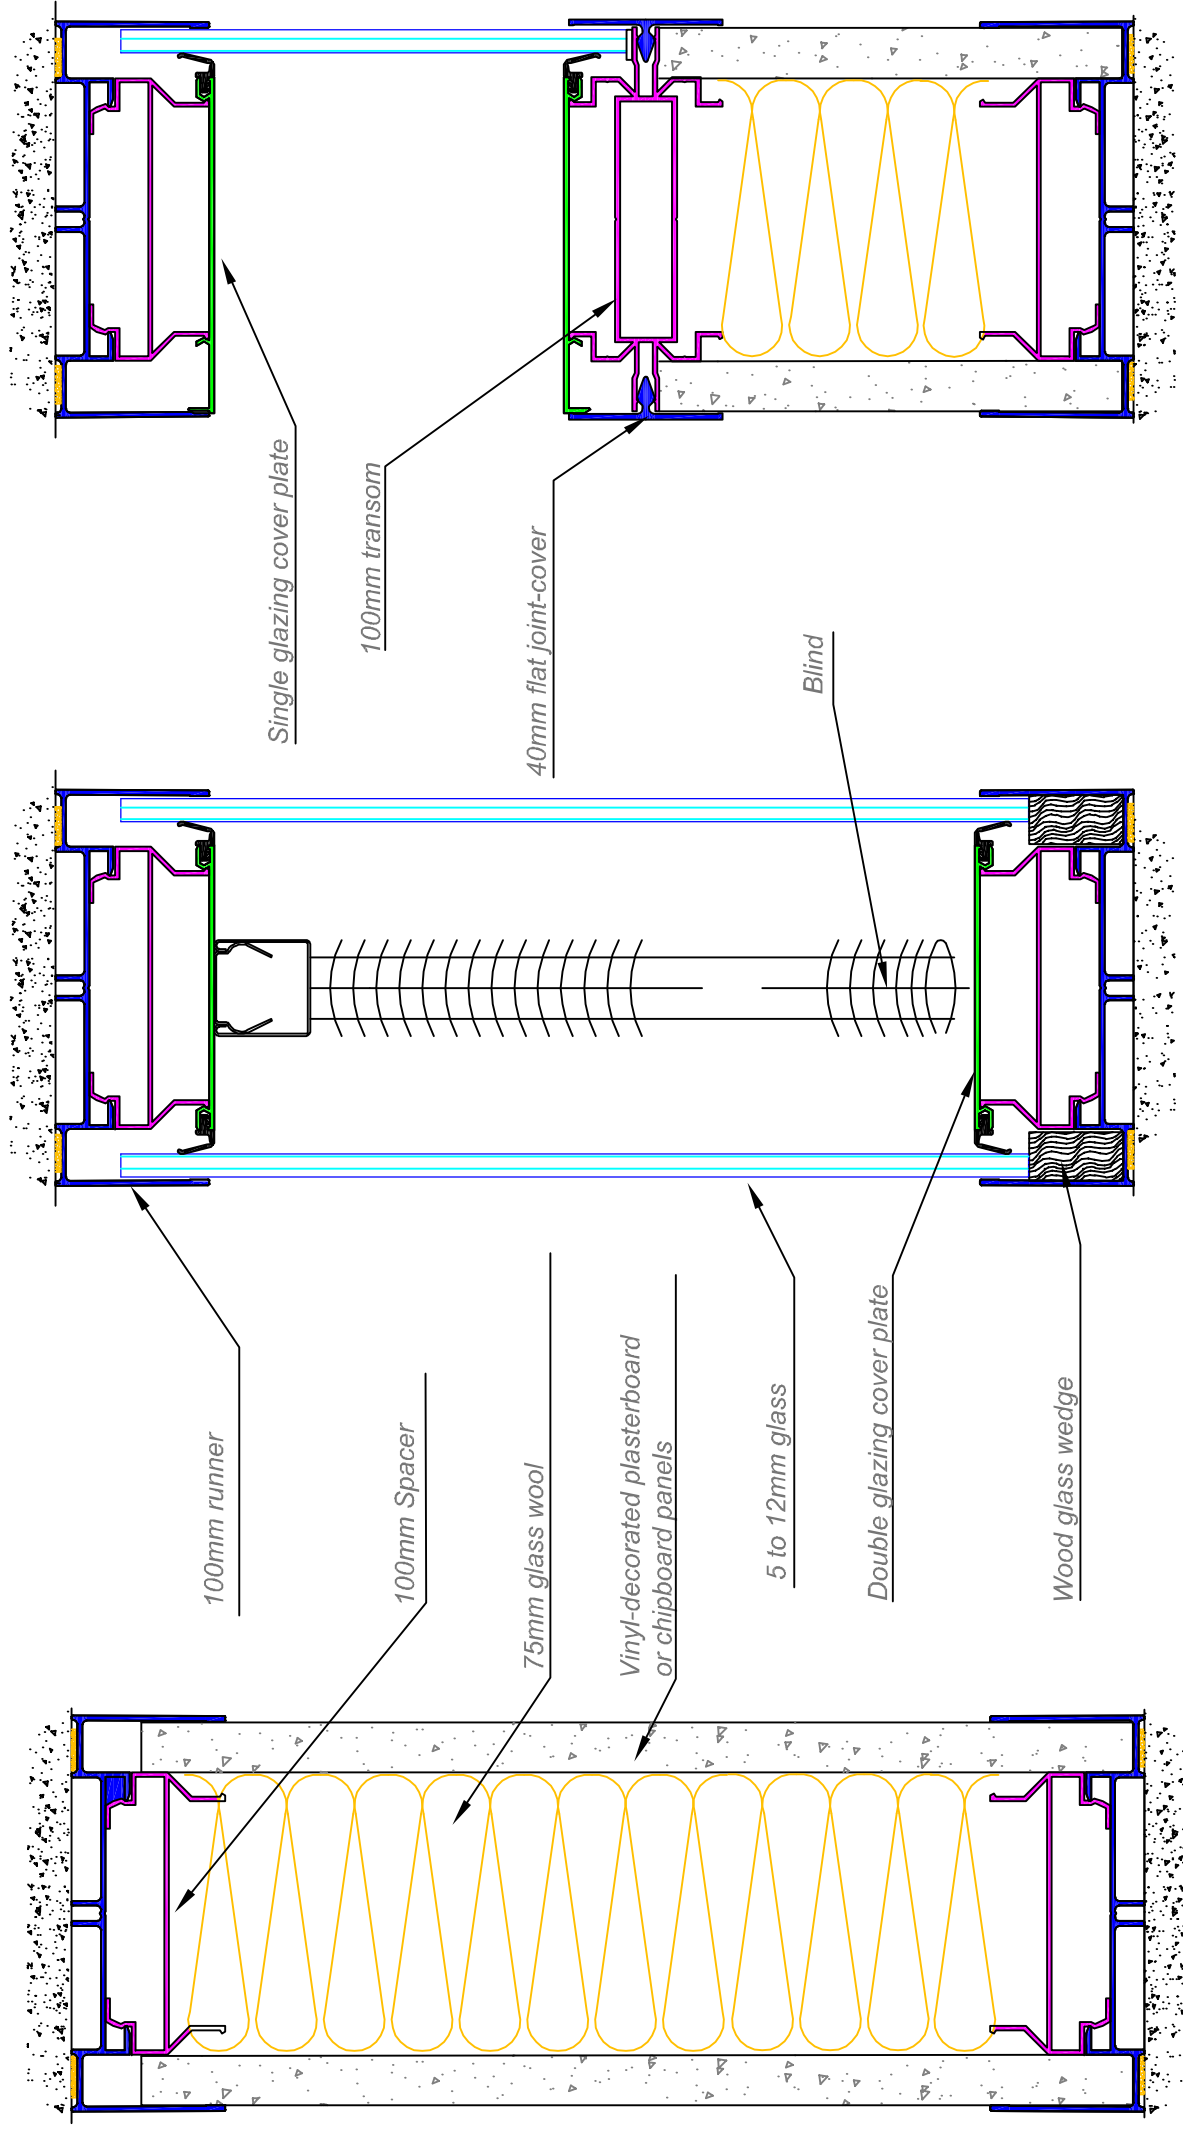

HORIZONTAL SECTION : OPEN VERSION

